

Product Description

Modular Lighting System 48V combines unornamented aesthetics with a multitude of configuration options and effortless installation. The outcome is an ecosystem of quality components perfect for spaces where constant flexibility and high performance are required.

Product Specification



Luminaire Wattage	15W
Luminaire Color	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black
Light Source	Osram3030
Color Temperature	2700K/3000K/4000K/5000K
Color Rendering Index	Ra≥90
Beam Angle	24°/45°
Luminous Flux	1061lm at 3000K
Driver	P61-4807-BM01-I
Input	AC220-240V 50-60Hz
Output	DC350mA 1X15W
Class	Class III
IP Degree	IP20
Inner Box	22.5X9.5X3cm
Carton Size	47X32X27cm
QTY/CTN	24PCS/CTN
Net Weight	0.55KG/PCS

Model No.

DC.TS0315-1

CONTACT US FOR MORE DETAILS


[WebLink](#)

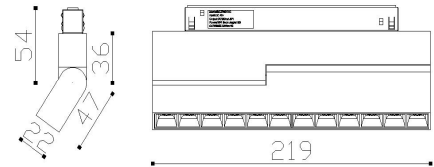


Light Distribution

24°

45°



h(m)	E(lx)	D(m)
		24°
1	3208	0.49
2	802	0.98
3	356	1.48
4	200	1.97



h(m)	E(lx)	D(m)
		45°
1	2270	0.67
2	567	1.34
3	252	2.01
4	141	2.67