

Product Description

Modular Lighting System 48V combines unornamented aesthetics with a multitude of configuration options and effortless installation. The outcome is an ecosystem of quality components perfect for spaces where constant flexibility and high performance are required.

Product Specification

Luminaire Wattage	15W
Luminaire Color	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black
Light Source	Luminus CXM-6AC40 1x15W DC
Color Temperature	2700K/3000K/3500K/4000K/500
Color Rendering Index	Ra≥90
Beam Angle	15°/24°/36°
Luminous Flux	844lm at 3000K
cut-out	/
Driver	BT-OL28WFD-40X700 (DC350mA)
Power Factor (PF)	/
Input	48V
Output	DC350mA 1X15W
Class	Class III
IP Degree	IP20
Adaptor	/
Inner Box	18X14X6cm
Carton Size	38X44X26cm
QTY/CTN	24PCS/CTN
Net Weight	0.41KG/PCS

Related references

Optional Accessories



Honeycomb



Combed Glass



Woven Glass


Model No.

DC.TS0115-C

CONTACT US FOR MORE DETAILS

WebLink

CCC CE RoHS

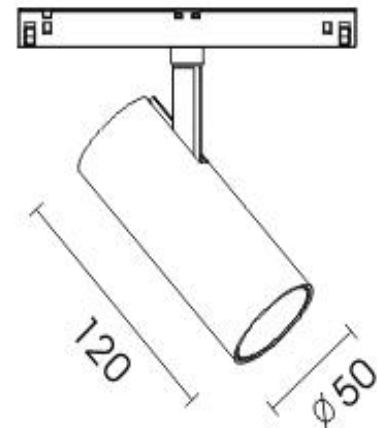

Optional Colors for Baffle



White

Golden

Black

Related project picture of product family:

Product application

