

Product Description


Blade is featured with small body, mini size can be perfectly applied in showcase or display areas. Pure aluminum housing and heatsink forms a good thermal system to guarantee light lumen maintenance and long lifespan.

Product Specification


Luminaire Wattage	1W
Luminaire Color	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black
Light Source	Luminus
Color Temperature	2700K/3000K/4000K/6000K
Color Rendering Index	Ra>95
Beam Angle	12°/20°/30°
Luminous Flux	91lm at 3000K
cut-out	Ø38mm
Driver	ELP01SS
Power Factor (PF)	≥0.50
Input	AC100-240V 50-60Hz
Output	DC 350mA 2.5-4V
Class	II
IP Degree	IP20
Inner Box	7X7X5cm
Carton Size	37X30X32cm
QTY/CTN	80PCS/CTN
Net Weight	0.05KG/PCS

Light Distribution


3000K 12°

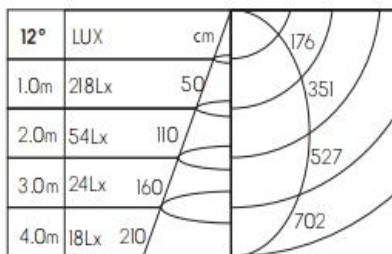

3000K 20°

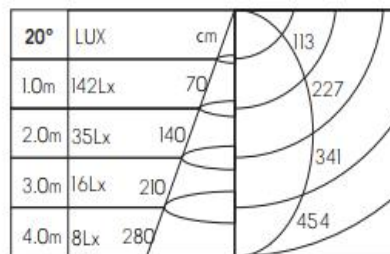

3000K 30°

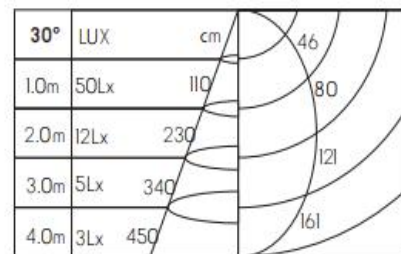

Related references

LED POWER SUPPLIES



Constant current power supply

Triac

0-10V

Dali


Brand: Eaglerise

Model No.

NDA0201-1

CONTACT US FOR MORE DETAILS

[WebLink](#)



Related project picture of product family:

