

Product Description

SIRIUS downlight series focus on the minimal appearance, giving stage to the light instead of the fixture. The fixture surface is treated by powder coating, making for a durable color, meeting the stylistic demands of different environments. It offers high anti-glare technology, high lighting efficiency and choice of dimensions and optical angles to fully satisfy all the different lighting effects.

Product Specification

Luminaire Wattage	3W
Luminaire Color	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black
Light Source	LUMINUS
Color Temperature	2700K/3000K/4000K
Color Rendering Index	Ra>95
Beam Angle	15°/24°/30°
Luminous Flux	100lm at 3000K
cut-out	Ø30MM
Driver	ELP03SS1
Power Factor (PF)	≥0.50
Input	AC100-240V 50-60Hz
Output	DC 700mA 2.5-4V
Class	II
IP Degree	IP20
Inner Box	7X7X5cm
Carton Size	37X30X32cm
QTY/CTN	80PCS/CTN
Net Weight	0.1KG/PCS

Model No.

NDB0401-2


CONTACT US FOR MORE DETAILS

WebLink




Light Distribution


3000K 15°

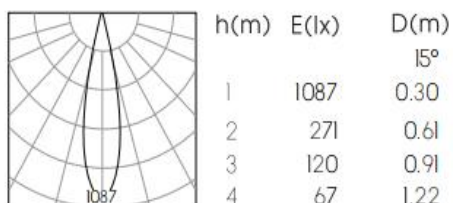

3000K 24°

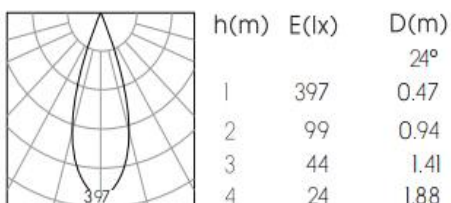

3000K 30°

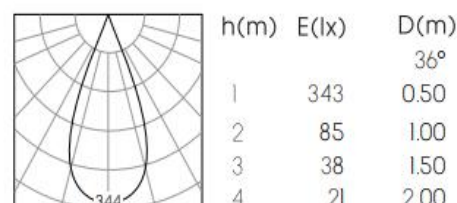

Related references
Optional Accessories



Honeycomb
Size: 17×3



Combed Glass
Size: 17×3



Woven Glass
Size: 17×3

Related references
LED POWER SUPPLIES



Constant current power supply
Brand: Eaglerise

Triac

0-10V

Dali

Related project picture of product family:

