

Product Description

Modular Lighting System 48V combines unornamented aesthetics with a multitude of configuration options and effortless installation. The outcome is an ecosystem of quality components perfect for spaces where constant flexibility and high performance are required.

Product Specification


Luminaire Wattage	8W
Luminaire Color	<input type="checkbox"/> White <input checked="" type="checkbox"/> Black
Light Source	CREE XHP35 1x8W DC500mA
Color Temperature	2700K/3000K
Color Rendering Index	Ra≥90
Beam Angle	15°/24°/30°/36°
Luminous Flux	375lm at 3000K
Driver	P61-4807-BM01-J
Input	48V
Output	DC500mA 1X8W
Class	Class III
IP Degree	IP20
Adaptor	48v adapter
Inner Box	7.5X7.5X41.5cm
Carton Size	32X47X43.5
QTY/CTN	24PCS/CTN
Net Weight	0.34KG/PCS

Model No.

DC.PS0108-1

CONTACT US FOR MORE DETAILS

[Weblink](#)

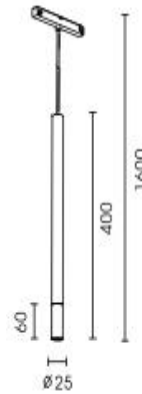


Light Distribution


15°

24°


36°



h(m)	E(lx)	D(m)
1	1067	0.42
2	269	0.84
3	119	1.26
4	67	1.68



h(m)	E(lx)	D(m)
1	685	0.53
2	171	1.06
3	76	1.59
4	42	2.12



h(m)	E(lx)	D(m)
1	471	0.62
2	118	1.25
3	52	1.87
4	29	2.49

Ledoux

Related references

Optional Accessories



Honeycomb



Combed Glass



Woven Glass

Optional Colors for Baffle



White

Golden

Black

Related project picture of product family:

