

Product Description

- 1.Lamp light source uses OSRAM Chip, with pure light color and CRI>90.
- 2.Front ring adopts 316L stainless steel material with Anti-rust passivation process for outdoor use.
- 3.The lamp body is processed by CNC aluminum , and the surface is sprayed with Aksu outdoor paint (double-layer coating process).
- 4.Multiple beam angles are available with uniform illumination.
- 5.The light source is hidden deeply, with 40°anti-glare cut-off angle.
- 6.With anti-glare honeycomb.
- 7.The lamp with exquisite structure,suitable for buildings,gardens and other places.

Product Specification


Luminaire Wattage	4.2W
Luminaire Color	■ Black
Light Source	Bridgelux V3 HD
Color Temperature	2700K/3000K/3500K/4000K
Color Rendering Index	Ra≥90
Beam Angle	12°/20°/30°/45°
Luminous Flux	210lm at 3000K
cut-out	/
Driver	DC24V驱动
Power Factor (PF)	≥0.5
Input	AC220-240V 50-60Hz
Output	Ø45
Class	ClassIII
IP Degree	IP67
Adaptor	/
Inner Box	9.8X8.9X9.8cm
Carton Size	23X48X53cm
QTY/CTN	50PCS/CTN
Net Weight	0.24KG/PCS

Model No.


BSB0504-C

CONTACT US FOR MORE DETAILS

WebLink



Light Distribution

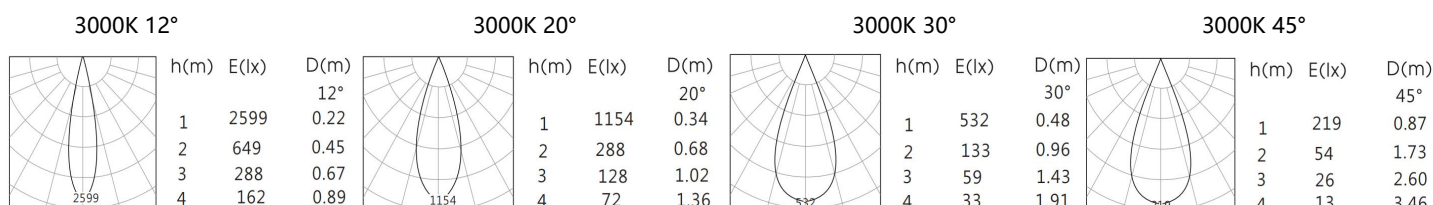

Related references

Optional Accessories



Honeycomb
Size: Ø28x3mm

Combed Glass
Size: /

Woven Glass
Size: /