

Product Description

- 1.Lamp light source uses OSRAM Chip, with pure light color and CRI>90 .
- 2.The lamp body is processed by CNC aluminum+Aluminum heat sink , and the surface is sprayed with Aksu outdoor paint (double-layer coating process:.) .
- 3.Multiple beam angles are available with uniform illumination.
- 4.The light source is hidden deeply, with 40°anti-glare cut-off angle .
- 5.With anti-glare honeycomb.
- 6.The lamp with mini and exquisite structure,suitable for buildings,gardens and other places.
- 7.Ground plug/Baffle are optional accessories, needs be ordered seperately.

Product Specification


Luminaire Wattage	10.2W
Luminaire Color	■ Black
Light Source	Bridgelux C8
Color Temperature	2700K/3000K/3500K/4000K
Color Rending Index	Ra≥90
Beam Angle	15°/24°/36°/40°
Luminous Flux	689lm at 3000K
cut-out	/
Driver	DC24V驱动
Power Factor (PF)	≥0.5
Input	AC220-240V 50-60Hz
Output	/
Class	ClassIII
IP Degree	IP66
Adaptor	/
Inner Box	11.9X11.9X7.9cm
Carton Size	23X23X43cm
QTY/CTN	20PCS/CTN
Net Weight	0.56KG/PCS

Model No.


GSA0510-C

CONTACT US FOR MORE DETAILS

WebLink



Light Distribution

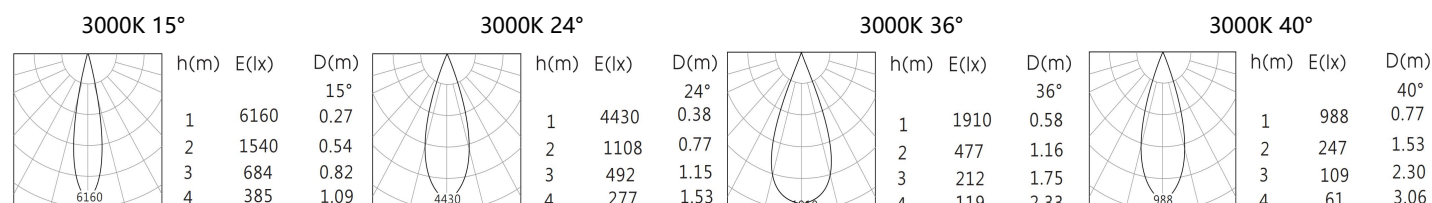

Related references

Optional Accessories



Honeycomb

Size: Ø50x3mm

Combed Glass

Size: /

Woven Glass

Size: /