

Product Description

- 1.Lamp light source uses OSRAM Chip, with pure light color and CRI>90 .
- 2.The lamp body is processed by CNC aluminum+Aluminum heat sink , and the surface is sprayed with Aksu outdoor paint (double-layer coating process:.) .
- 3.Multiple beam angles are available with uniform illumination.
- 4.The light source is hidden deeply, with 40°anti-glare cut-off angle .
- 5.With anti-glare honeycomb.
- 6.The lamp with mini and exquisite structure,suitable for buildings,gardens and other places.
- 7.Ground plug/Baffle are optional accessories, needs be ordered seperately.

Product Specification


| | |
|-----------------------|-------------------------|
| Luminaire Wattage | 18.5W |
| Luminaire Color | ■ Black |
| Light Source | Bridgelux C8 |
| Color Temperature | 2700K/3000K/3500K/4000K |
| Color Rendering Index | Ra≥90 |
| Beam Angle | 15°/24°/36°/40° |
| Luminous Flux | 964lm at 3000K |
| cut-out | / |
| Driver | DC24V驱动 |
| Power Factor (PF) | ≥0.5 |
| Input | AC220-240V 50-60Hz |
| Output | / |
| Class | ClassIII |
| IP Degree | IP66 |
| Adaptor | / |
| Inner Box | 14.5X10.6X10.8cm |
| Carton Size | 17X32X58cm |
| QTY/CTN | 10PCS/CTN |
| Net Weight | 0.95KG/PCS |

Model No.


GSA0515-C

CONTACT US FOR MORE DETAILS

WebLink



Light Distribution

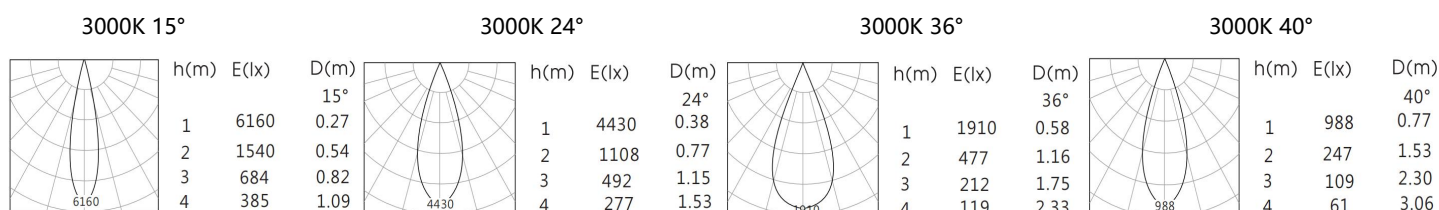

Related references

Optional Accessories



Honeycomb

Size: Ø58x3mm

Combed Glass

Size: /

Woven Glass

Size: /