

Product Description

Hepburn is an elegant combination of classic looks and advanced modern technology. This is a family of miniaturized LED spotlight designed to achieve smallest size of the same power in industry, therefore to meet visual and aesthetic requirement for interior design. Small body can reduce thermal contact resistance and help for heat dissipation. Meanwhile, adoption of advanced thermal superconductor technology with 300,000w/mk guarantees heat generated from LED being instantly transferred and radiated into the air. This keeps the fitting in good lumen maintenance and long lifespan. Hepburn is designed in a variety of different installations to be the perfect match for every environment.

Product Specification


Luminaire Wattage	20W
Luminaire Color	□ White ■ Black
Light Source	LUMINUS CLM-9
Color Temperature	2700K/3000K/4000K/5000K
Color Rendering Index	Ra≥90
Beam Angle	15°/24°/36°
Luminous Flux	1732lm at 3000K
Driver	LS-20-500 LI1
Power Factor (PF)	≥0.9
Input	AC220-240V 50-60Hz
Output	DC500mA 25V-42V
Class	Class II
IP Degree	IP20
Cut out	Ø95MM
Inner Box	14*14*13.5cm
Carton Size	58*30*42cm
QTY/CTN	24PCS/CTN
Net Weight	0.34KG/PCS

Model No.

HB.D220

CONTACT US FOR MORE DETAILS

[Weblink](#)

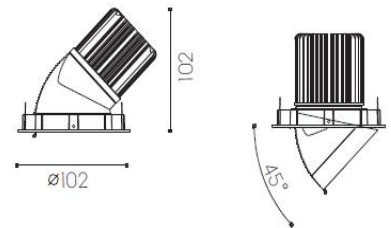

Light Distribution

3000K 15°				3000K 24°				3000K 36°			
h(m)	E(lx)	D(m)		h(m)	E(lx)	D(m)		h(m)	E(lx)	D(m)	
1	9736	15°		1	7800	24°		1	5093	36°	
2	2434	0.64		2	1950	0.84		2	1273	1.12	
3	1081	0.96		3	866	1.27		3	565	1.67	
4	408	1.27		4	487	1.69		4	318	2.23	

Related references

LED POWER SUPPLIES



Constant current power supply

Triac

0-10V

Dali



