

Product Description

Modular Lighting System 48V combines unornamented aesthetics with a multitude of configuration options and effortless installation. The outcome is an ecosystem of quality components perfect for spaces where constant flexibility and high performance are required.

Product Specification


Luminaire Wattage	8W
Luminaire Color	■ White □ Black
Light Source	Osram3030
Color Temperature	2700K/3000K/4000K/5000K
Color Rendering Index	Ra≥90
Beam Angle	24°/45°
Luminous Flux	440lm at 3000K
Driver	P63-4806C-BM18
Input	AC220-240V 50-60Hz
Output	DC150mA 1X6W
Class	Class III
IP Degree	IP20
Inner Box	12.5X3.5X3cm
Carton Size	
QTY/CTN	PCS/CTN
Net Weight	KG/PCS

Model No.

DC.TB0308-1

CONTACT US FOR MORE DETAILS


WebLink

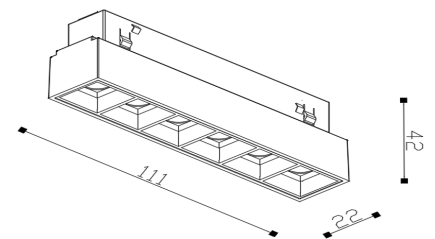


Light Distribution

24°

45°

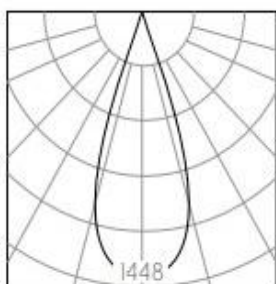

h(m)	E(lx)	D(m)
		24°
1	1447	0.45
2	361	0.91
3	160	1.36
4	90	1.82

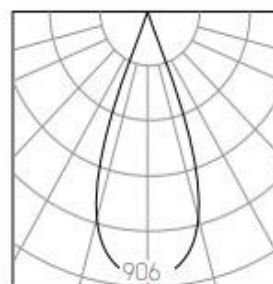

h(m)	E(lx)	D(m)
		45°
1	906	0.71
2	226	1.43
3	100	2.14
4	56	2.85