


## Product Description

Kulle's with the appearance of strong and power design, which bring the industrial style of for the application. Innovative thermal design to incorporate pure aluminum body as heatsink and air convection cooling guarantees LED's stable performance and long lifespan. Moreover, the TSU2020-C, with the function of rotating the lamp head to adjust the beam angle freely 15°, 30° and 45°.

## Product Specification

Luminaire Wattage	25W
Luminaire Color	□ White ■ Black
Light Source	LUMINUS CHM-9
Color Temperature	2700K/3000K/4000K
Color Rendering Index	Ra≥90
Beam Angle	12-55°
Luminous Flux	1100lm at 3000K
Driver	500mA
Power Factor (PF)	≥0.9
Input	AC220-240V 50-60Hz
Output	DC600mA 21-40V
Class	Class I
IP Degree	IP20
Inner Box	20*8*20cm
Carton Size	42.5*41.5*42cm
QTY/CTN	20PCS/CTN
Net Weight	0.6KG/PCS

## Light Distribution

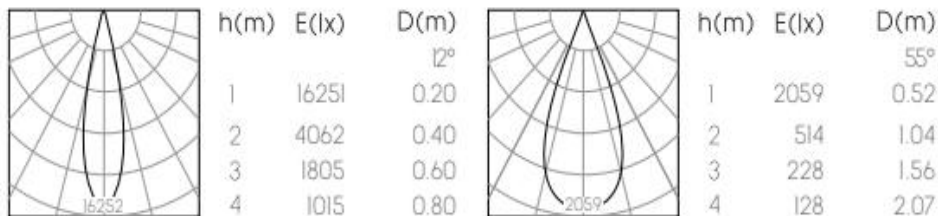


Model No.

TSU3025-C

CONTACT US FOR MORE DETAILS

[WebLink](#)

CCC CE RoHS



## Related references

### LED POWER SUPPLIES



Constant current power supply



Triac

0-10V

Dali